


W32

MARINER

Standard Features

- P21 with Refillable Purifier Element for FAD upto 170 lt/min
- P41 Purifier (stainless steel) with Refillable Purifier Element (stainless Steel) for FAD higher than 170 lt/min
- 2nd and 3rd stages Water Separator
- Intercoolers (Stainless Steel)
- Aftercooler (Stainless Steel)
- Priority Valve (Pressure Maintaining Valve)
- Check Valve
- Manual Drain
- Manual Start-Stop
- 2 Filling Hose (Yoke, Filling Valve, Pressure Gauge, DIN Adapter)
- Air Quality comply with EN 12021

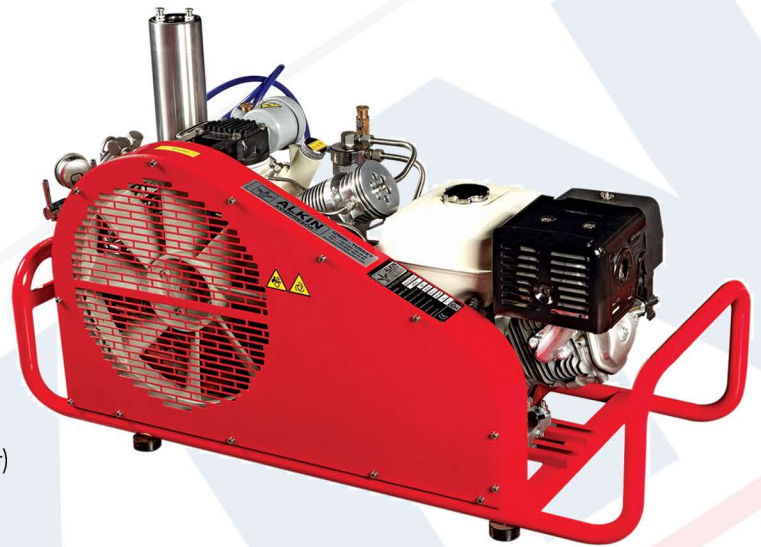

Optional Features

- Automatic Start/Stop
- Auto Drain
- Diesel Engine: manual or electric start
- Extra Filling Hoses
- Dual Pressure Systems 225-310 Bar / 3260-4500 Psi
- Disposable Filter Cartridge

Sectors

- Scuba Diving
- Fire Brigades
- Military Applications
- Naval Applications
- Fish Farms
- Gas Filling Facilities
- Marine

| ALKIN Model | Working Pressure | | Displacement Capacity | | | Motor Power | | RPM | Stages | Cylinders | Kg. | Dimensions (cm) | | |
|--------------------|------------------|-----------|-----------------------|-------------------|-----|-------------|----|------|--------|-----------|-----|-----------------|-----|----|
| | Bar | Psi | Lt/min | m ³ /h | Cfm | HP | KW | | | | | w | L | H |
| W32 Mariner Petrol | 225/310 | 3260/4500 | 170 | 10,2 | 6 | 6 | - | 1300 | 3 | 3 | 150 | 56 | 129 | 67 |
| | 225/310 | 3260/4500 | 240 | 14,4 | 8,4 | 9 | - | 1500 | 3 | 3 | 180 | 56 | 129 | 71 |
| | 225/310 | 3260/4500 | 300 | 18 | 11 | 13 | - | 1700 | 3 | 3 | 190 | 56 | 129 | 71 |

Please note that information and pictures may be changed or updated without notice, at any time.